




1

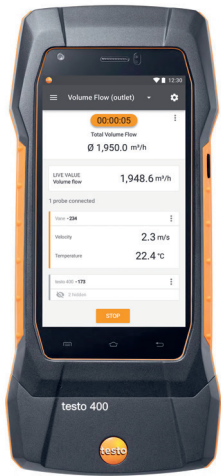

2

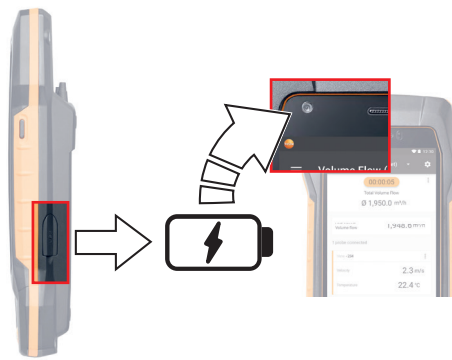

3 LED status

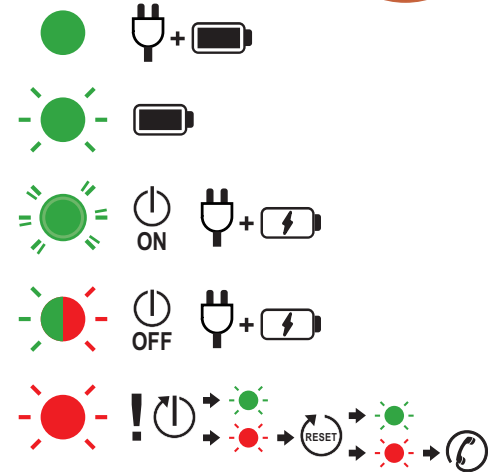

4



5




6












210 x 95 x 39 mm 8.3 x 3.7 x 1.5 in 	-5...+45 °C +23...+113 °F -20...+60 °C -4...+140 °F 	Rechargeable Li-Ion battery (5550 mAh)	T (NTC): 0,1 °C / 0,1 °F T (TE): 0,1 °C / 0,1 °F Δp: 0,001 hPa / 0,001 lnH ₂ O p: 0,1 hPa / 0,1 lnH ₂ O	T (NTC): -40 ... +150 °C / -40 ... +302 °F T (TE): -200 ... +1370 °C / -328 ... +2498 °F Δp: 0 ... +200 hPa / 0 ... +80 lnH ₂ O p: +700 ... +1100 hPa / +280 ... +440 lnH ₂ O	T (NTC): ±0,2 °C ±1 digit (-25 ... +74,9 °C) / ±0,4 °F ±1 digit (-13° ... +166,8 °F) ±0,4 °C ±1 digit (-40 ... -25,1 °C) / ±0,7 °F ±1 digit (-40° ... -13,2 °F) ±0,4 °C ±1 digit (+75 ... +99,9 °C) / ±0,7 °F ±1 digit (+167° ... +211,8 °F) ±0.5 % of mv ±1 digit (remaining range) T (TE): ±(0,3 °C + 0,1 % of mv) ±1 digit / ±(0,5 °F + 0.1 % of mv) ±1 digit Δp: ±(0,3 Pa + 1 % of mv) ±1 digit (0 ... 25 hPa) / ±(0,0 lnH ₂ O + 1 % of mv) ±1 digit (0 ... 25 lnH ₂ O) ±(0,1 hPa + 1,5 % of mv) ±1 digit (25001 ... 200 hPa) / ±(0,0 lnH ₂ O + 1.5 % of mv) ±1 digit (10000 ... 80 lnH ₂ O) p: ±3 hPa / ±1 lnH ₂ O


Approvals and Certification

Product 产品名称	testo 400
Mat.-No. 型号	0440 4000
Date 日期	14.02.2024

 The use of the wireless module is subject to the regulations and stipulations of the respective country of use, and the module may only be used in countries for which a country certification has been granted. The user and every owner has the obligation to adhere to these regulations and prerequisites for use, and acknowledges that the re-sale, export, import etc. in particular in countries without wireless permits, is his responsibility.

Country	Comments
Australia New Zealand	 E 1561
Canada	Contains IC: 21461-LSD4BTS98 Compliance Distance: 10 mm See IC Warning
China	CMIT ID: 23J9939LL523
Europa + EFTA	 <p> Hereby, Testo SE & Co. KGaA declares that the radio equipment type testo 400 – 0440 4000 is in compliance with Directive 2014/53/EU.</p> <p>The full text of the EU declaration of conformity is available at the following internet address: https://www.testo.com/eu-conformity</p> <p>EU countries: Belgium (BE), Bulgaria (BG), Denmark (DK), Germany (DE), Estonia (EE), Finland (FI), France (FR), Greece (GR), Ireland (IE), Italy (IT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Sweden (SE), Slovakia (SK), Slovenia (SI), Spain (ES), Czech Republic (CZ), Hungary (HU), Republic of Cyprus (CY).</p> <p>EFTA countries: Iceland, Liechtenstein, Norway, Switzerland</p>  WEEE Reg. no. DE 75334352
Japan	Contains Lierda S98 BLE module  201-200960 See Japan information
South Korea	 R-R-te2-04404000 Contains: R-R-te2-S98 See KCC Warning
Türkiye	Authorized
United Kingdom (GB)	 <p> The UK Declaration of Conformity can be found on the testo homepage www.testo.com under the product specific downloads.</p>
USA	 <p>Contains FCC ID: N8NLS4BT-S98 See FCC Warnings</p>

Bluetooth® Module	Feature 特征与参数	Values 数值
	Bluetooth® range / 范围	up to 60 m (196 feet) (free field / 无障碍场地)
	Radio type / 型号	Bluetooth® Low Energy (BLE)
	Company / 制造商	Lierda Science & Technology Group Co., Ltd Lierda LSD4BT-S98B
	RF Band / 射频频段	2402–2480 MHz
	Power output / 输出功率	8.77 dBm
Bluetooth® SIG Listing	Declaration ID	D051404
	Member company	Testo SE & Co. KGaA

	Comments
Hongkong	Authorized
Taiwan	 CCAB23Y10090T2 See NCC Warning / NCC 警告見

IC Warnings

RSS-Gen & RSS-247 statement:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage.
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radio-électrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement..

Caution: Radio Frequency Radiation Exposure

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment and meets the IC radio frequency (RF) Exposure Guidelines.

Co-Location:

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Attention : exposition au rayonnement de radiofréquences

Cet équipement est conforme aux limites d'exposition aux radiofréquences IC fixées pour un environnement non contrôlé et aux Lignes directrices relatives à l'exposition aux radiofréquences (RF).

Co-Location

Ce transmetteur ne peut pas être installé en colocation ou être utilisé avec une autre antenne ou transmetteur, quel qu'en soit le type.

FCC Warnings

Information from the FCC (Federal Communications Commission)

For your own safety

Shielded cables should be used for a composite interface. This is to ensure continued protection against radio frequency interference.

FCC warning statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Shielded interface cable must be used in order to comply with the emission limits.

Warning

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution: Radio Frequency Radiation Exposure

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines.

Co-Location:

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Japan Information

当該機器には電波法に基づく、技術基準適合証明等を受けた特定無線設備を装着している。

KCC Warning

이 기기는 사용 중 전파 혼신 가능성이 있으며, 타 기기로부터 유해한 혼신을 받을 수 있음.

NCC Warning / NCC 警告見

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規動作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。